
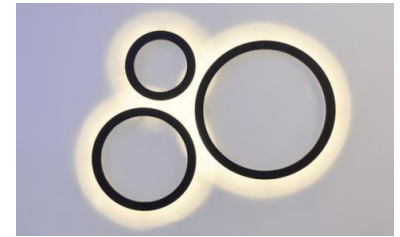


**PRODUCT DESCRIPTION**

Wall fixture for indirect lighting. Available in different diameters.  
The tunable white version has a color range from 2400K up to 6500K.

**TECHNICAL DATA**

|                       |                          |
|-----------------------|--------------------------|
| Application           | ceiling/wall - surface   |
| Dimensions            | ø400 - 600 - 800mm h80mm |
| IP rating             | IP20                     |
| Power                 | 24V                      |
| Lifetime L70/F10/65°C | 35000h                   |
| MacAdam ellipse       | 4                        |
| Guarantee             | 5 year                   |



400, 600, 800

| Color Temperature | Wattage | Supply voltage | Lumen (LED)<br>(at tp = 65°C) | Lumen/Watt (LED)<br>(at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|----------------|-------------------------------|------------------------------------|-----|--------------|
| 2400K-6500K       |         |                |                               |                                    |     |              |
| ø400mm            | 30,7W   | 24V DC         | 1780 lm                       | 58 lm/W                            | 90+ | A            |
| ø600mm            | 48,0W   | 24V DC         | 2781 lm                       | 58 lm/W                            | 90+ | A            |
| ø800mm            | 66,3W   | 24V DC         | 3838 lm                       | 58 lm/W                            | 90+ | A            |

**ORDER REFERENCE**> FIXTURE

|           |                     |   |
|-----------|---------------------|---|
| <b>TW</b> |                     |   |
| ø400mm    | ZUMI16XS140TW01031B | The O TW 30,7W 24V DC 1780 lm 2400K-2600K CRI90+ excl.conv. black |
| ø600mm    | ZUMI16S140TW01031B  | The O TW 48,0W 24V DC 2781 lm 2400K-2600K CRI90+ excl.conv. black |
| ø800mm    | ZUMI16M140TW01031B  | The O TW 66,3W 24V DC 1838 lm 2400K-2600K CRI90+ excl.conv. black |

\*RAL-colors on request

> CONVERTER + DIMMODULE - REQUIRED

CONVERTER

|             |              |                     |
|-------------|--------------|---------------------|
| <b>35W</b>  | TRID28000411 | LCU 35W 24V TOP SR  |
| <b>60W</b>  | TRID28000412 | LCU 60W 24V TOP SR  |
| <b>96W</b>  | TRID28000413 | LCU 96W 24V TOP SR  |
| <b>180W</b> | TRID28000414 | LCU 180W 24V TOP SR |

\*converter placed at max. 10m of the fixture!

+ DIMMODULE (one device for each converter)

|              |               |                 |
|--------------|---------------|-----------------|
| <b>DALI</b>  | LUNA89453836  | DALI CC-WW PWM  |
| <b>1-10V</b> | TRONK00004025 | fd analog 3-48e |