
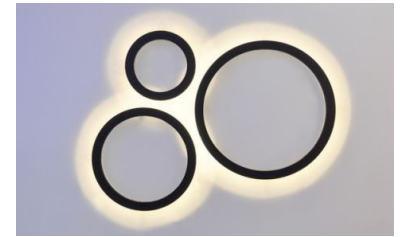


PRODUCT DESCRIPTION

Wall fixture for indirect lighting. Available in different diameters and color temperatures.

**TECHNICAL DATA**

Application	ceiling/wall - surface
Dimensions	ø400 - 600 - 800mm h80mm
IP rating	IP20
Power	24V
Lifetime L70/F10/65°C	50000h
MacAdam ellipse	3
Guarantee	5 year



Color Temperature	Wattage	Supply voltage	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K						
ø400mm	19,4W	24V DC	1656 lm	86 lm/W	90+	A+
ø600mm	33,9W	24V DC	2898 lm	86 lm/W	90+	A+
ø800mm	48,4W	24V DC	4140 lm	86 lm/W	90+	A+
3000K						
ø400mm	19,4W	24V DC	1837 lm	95 lm/W	90+	A+
ø600mm	33,9W	24V DC	3216 lm	95 lm/W	90+	A+
ø800mm	48,4W	24V DC	4594 lm	95 lm/W	90+	A+
4000K						
ø400mm	19,4W	24V DC	1911 lm	99 lm/W	90+	A+
ø600mm	33,9W	24V DC	3345 lm	99 lm/W	90+	A+
ø800mm	48,4W	24V DC	4777 lm	99 lm/W	90+	A+

ORDER REFERENCE

> FIXTURE

2700K

ø400mm	ZUMI16XS08992701031B	The O 19,4W 24V DC 1656 lm 2700K CRI90+ excl.conv. black
ø600mm	ZUMI16S08992701031B	The O 33,9W 24V DC 2898 lm 2700K CRI90+ excl.conv. black
ø800mm	ZUMI16M08992701031B	The O 48,4W 24V DC 4140 lm 2700K CRI90+ excl.conv. black

3000K

ø400mm	ZUMI16XS08993001031B	The O 19,4W 24V DC 1837 lm 3000K CRI90+ excl.conv. black
ø600mm	ZUMI16S08993001031B	The O 33,9W 24V DC 3216 lm 3000K CRI90+ excl.conv. black
ø800mm	ZUMI16M08993001031B	The O 48,4W 24V DC 4594 lm 3000K CRI90+ excl.conv. black

4000K

ø400mm	ZUMI16XS08994001031B	The O 19,4W 24V DC 1911 lm 4000K CRI90+ excl.conv. black
ø600mm	ZUMI16S08994001031B	The O 33,9W 24V DC 3345 lm 4000K CRI90+ excl.conv. black
ø800mm	ZUMI16M08994001031B	The O 48,4W 24V DC 4777 lm 4000K CRI90+ excl.conv. black

*RAL-colors on request

> CONVERTER - REQUIRED

35W	TRID28000411	LCU 35W 24V TOP SR
60W	TRID28000412	LCU 60W 24V TOP SR
96W	TRID28000413	LCU 96W 24V TOP SR
180W	TRID28000414	LCU 180W 24V TOP SR

**converter placed at max. 10m of the fixture!*

IF DIMMABLE: + DIMMODULE (one device for each converter)

DALI	TRONK00004020	fd dali 1-48e
switchDIM	TRONK00004221	fd touch 1-48e
1-10V	TRONKAOP1E24	fd analog 1-48e