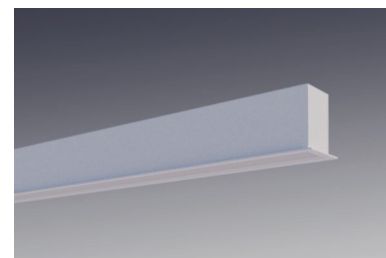


PRODUCT DESCRIPTION


Extruded recessed profile in aluminium, champagne, white or black powder coated with opal polycarbonate protection. Available in several color temperatures, dimmable and non dimmable.

Different compositions can be made with different lengths and corners.

**TECHNICAL DATA**

Application	ceiling - ressed
Dimensions	L x 52 x 60mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Forward current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	450mA	144 lm/W	80+	A++
3000K	450mA	152 lm/W	80+	A++
4000K	450mA	158 lm/W	80+	A++

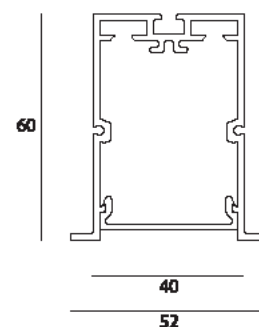**ORDER REFERENCE**

> [PROFILE](#)

PROFILE /m	ZUMI41EPR	+ W / B / A / C	U40 EMPTY profile /m
END CAP	ZUMI41ECR	+ W / B / A / C	U40 ENDCAP
PMMA /m	ZUMI41PMMA		U40 PMMA satin plexi profile/m

(W (white) / B (black) / A (aluminium) / C (champagne))

> [MODULES FOR PMMA](#)

PMMA NOT INCLUDED, TO BE ORDERED SEPARATELY!

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
2700K	1685mm	ZUMI41PL1568270101	72,5W	9060 lm
	1404mm	ZUMI41PM1568270101	60,4W	7550 lm
	1123mm	ZUMI41PS1568270101	48,3W	6040 lm
	842mm	ZUMI41M1568270101	36,2W	4530 lm
	562mm	ZUMI41S1568270101	24,4W	3020 lm

3000K	1685mm	ZUMI41PL1498300101	72,5W	9540 lm
	1404mm	ZUMI41PM1498300101	60,4W	7950 lm
	1123mm	ZUMI41PS1498300101	48,3W	6360 lm
	842mm	ZUMI41M1498300101	36,2W	4770 lm
	562mm	ZUMI41S1498300101	24,4W	3180 lm

4000K	1685mm	ZUMI41PL1508400101	72,5W	9960 lm
	1404mm	ZUMI41PM1508400101	60,4W	8300 lm
	1123mm	ZUMI41PS1508400101	48,3W	6640 lm
	842mm	ZUMI41M1508400101	36,2W	4980 lm
	562mm	ZUMI41S1508400101	24,4W	3320 lm

> OPTIONS**CORNER 90°**

ZUMI41C90

U40 Corner 90°

CORNER 180°

ZUMI41C180

U40 Corner 180°

COVERPROF.

ZUMI41CP

+ W / B / A / C

U40 coverprofile /m

MOUNTING BRACKET

ZUMI41MB

U40 Mounting bracket

EMERGENCY KIT

on request

> CONVERTER

Included, if dimmable: DALI, DSI, switchDIM (for dimmable add D to order reference!)