
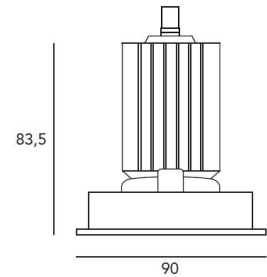


PRODUCT DESCRIPTION

Adjustable recessed downlighter for general or accent lighting.
Aluminium fixture, white or black powder coated, provided with a LEDmodule which replaces the GU10 halogen spotlight. Available in 2700, 3000 and 4000K.

TECHNICAL DATA

Application	ceiling - recessed
Dimensions	cut out: torsion springs: ø86mm h110mm flat springs: ø83mm h110mm
IP rating	IP20
Power	230V
Lifetime L70/B10/75°C	42000h
MacAdam ellipse	3
Guarantee	3 year

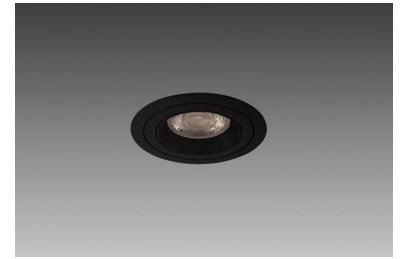

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	9,5W	230V	710 lm	75 lm/W	90+	A+
3000K	9,5W	230V	760 lm	80 lm/W	90+	A+
4000K	9,5W	230V	810 lm	85 lm/W	90+	A+

ORDER REFERENCE

> [FIXTURE](#)

ORDER REFERENCE + W (white) / B (black)

2700K

24°	ZUMI3817492715012	Rori AC 9,5W 230V 710 lm 2700K CRI90 24° excl. conv.
36°	ZUMI3817592716012	Rori AC 9,5W 230V 710 lm 2700K CRI90 36° excl. conv.

3000K

24°	ZUMI3817693015012	Rori AC 9,5W 230V 760 lm 3000K CRI90 24° excl. conv.
36°	ZUMI3817793016012	Rori AC 9,5W 230V 760 lm 3000K CRI90 36° excl. conv.

4000K

24°	ZUMI3817894015012	Rori AC 9,5W 230V 810 lm 4000K CRI90 24° excl. conv.
36°	ZUMI3817994016012	Rori AC 9,5W 230V 810 lm 4000K CRI90 36° excl. conv.