

°in new






materials	aluminium coated or anodised / PC
weight	175gr - 0,38lb for 286 mm
voltage	48 Vdc
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
	*from Q3 2020

IP20    ENEC



Length

mm – inch

1144 - 45.03	
858 - 33.77	
572 - 22.51	
286 - 11.25	
143 - 5.62	

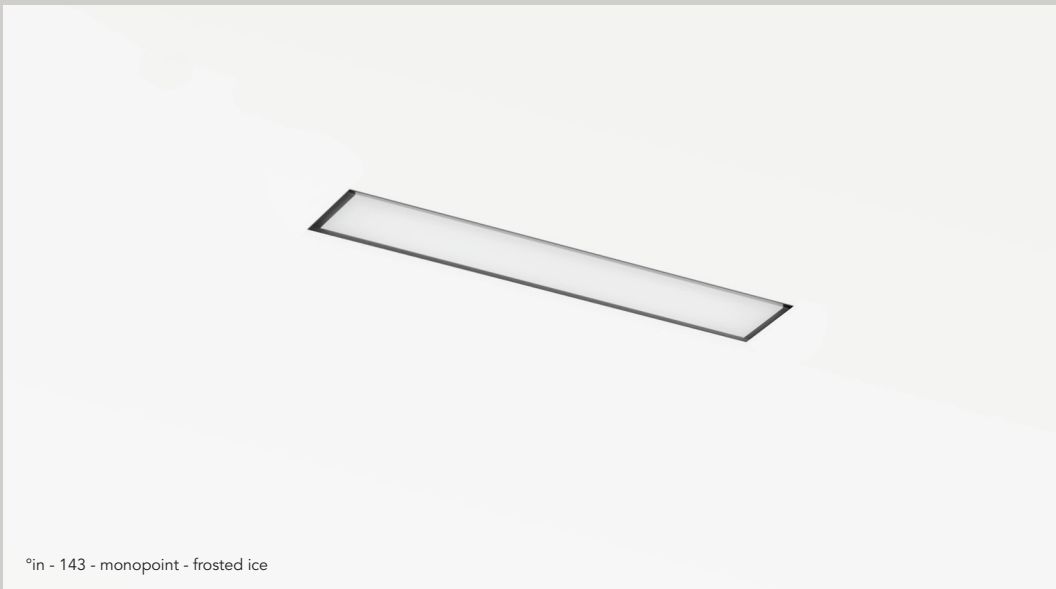


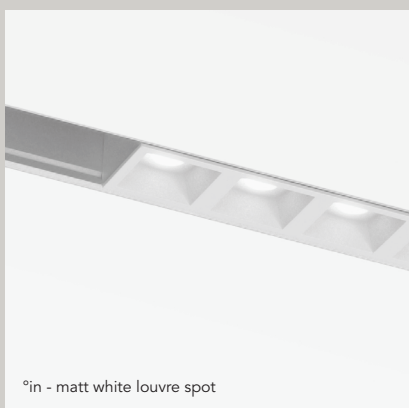
°in - 143 - monopoint - black glossy louvre



°in - 286 - black glossy louvre

length (mm)	beam °	color K	CRI ra	candela cd	lumen lm	power W	efficacy lm/W	glare UGR
frosted ice								
143	106	3000	95	125	342,5	4,1	84	<30
286	106	3000	95	250	685	8,2	84	<30
572	106	3000	95	500	1370	16,4	84	<30
858	106	3000	95	750	2055	24,6	84	<30
1144	106	3000	95	1000	2740	32,8	84	<30
microprism								
143	90	3000	95	200	425	4,1	104	<30
286	90	3000	95	400	850	8,2	104	<30
572	90	3000	95	800	1700	16,4	104	<30
858	90	3000	95	1200	2550	24,6	104	<30
1144	90	3000	95	1600	3400	32,8	104	<30
frosted ice high output								
143	106	3000	95	248	700	8,4	83	<31
286	106	3000	95	496	1400	16,8	83	<31
microprism high output								
143	90	3000	95	420	910	8,4	108	<31
286	90	3000	95	840	1820	16,8	108	<31
spot								
143	20	3000	>95	2210	390	6,2	63	<11
286	20	3000	>95	4350	850	13	65	<11
572	20	3000	>95	8700	1700	26	65	<11
858	20	3000	>95	13050	2550	39	65	<11
1144	20	3000	>95	17400	3400	52	65	<11
143	35	3000	>95	890	400	6,2	65	<15
286	35	3000	>95	2040	880	13	68	<15
572	35	3000	>95	4080	1760	26	68	<15
858	35	3000	>95	6120	2640	39	68	<15
1144	35	3000	>95	8160	3520	52	68	<15
143	60	3000	>95	510	340	6,2	55	<16
286	60	3000	>95	790	750	13	58	<16
572	60	3000	>95	1580	1500	26	58	<16
858	60	3000	>95	2370	2250	39	58	<16
1144	60	3000	>95	3160	3000	52	58	<16
spot high output								
143	20	3000	>95	3100	595	9	66	<11
286	20	3000	>95	6200	1190	18	66	<11
143	35	3000	>95	1420	550	9	61	<15
286	35	3000	>95	2840	1100	18	61	<15
143	60	3000	>95	735	550	9	61	<16
286	60	3000	>95	1470	1100	18	61	<16





Order Code

10701.AA00.BBBB.CCC.DD in 143 mm
 10702.AA00.BBBB.CCC.DD in 143 mm high output
 10703.AA00.BBBB.CCC.DD in 143 mm monopoint
 10704.AA00.BBBB.CCC.DD in 143 mm monopoint high output

10711.AA00.BBBB.CCC.DD in 286 mm
 10712.AA00.BBBB.CCC.DD in 286 mm high output
 10713.AA00.BBBB.CCC.DD in 286 mm monopoint
 10714.AA00.BBBB.CCC.DD in 286 mm monopoint high output

10721.AA00.BBBB.CCC.DD in 572 mm
 10722.AA00.BBBB.CCC.DD in 572 mm high output
 10723.AA00.BBBB.CCC.DD in 572 mm monopoint
 10724.AA00.BBBB.CCC.DD in 572 mm monopoint high output

10731.AA00.BBBB.CCC.DD in 858 mm
 10732.AA00.BBBB.CCC.DD in 858 mm high output

10741.AA00.BBBB.CCC.DD in 1144 mm
 10742.AA00.BBBB.CCC.DD in 1144 mm high output

Other lengths on request (a multiple of 286 mm)

AA Finish

01 black
 02 white

BBBB Light

9527 cri >95, 2700K
 9530 cri >95, 3000K
 9540 cri >95, 4000K - on request
 90TW cri >90, tunable white - on request
 only for frosted ice & microprism

CCC Optic

001 frosted ice
 002 microprism
 205 20° black glossy louvre
 355 35° black glossy louvre
 605 60° black glossy louvre
 206 20° black matt louvre
 356 35° black matt louvre
 606 60° black matt louvre
 207 20° white matt louvre
 357 35° white matt louvre
 607 60° white matt louvre

DD Dimming

ND no dimming
 DA dali (0/1-10V, switchDIM, Casambi through interface)

Accessories

10108 line S plasterkit in 143 mm
 10109 line S plasterkit in 286 mm
 10110 line S plasterkit in 572 mm