

# °bloc.bevel

materials aluminium coated or anodised / PC  
weight 600gr / 1.32lb  
voltage 48 Vdc  
wattage 8,2 W  
ugr <19  
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa\*  
\*from Q3 2020

IP20  CE  ENEC





**Natural**  
anodised  
aluminum

**Brass**  
anodised  
aluminum

**Bronze**  
anodised  
aluminum

**Dark Bronze**  
anodised  
aluminum

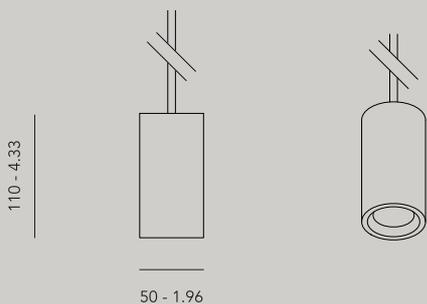

**Order Code**

20500.AA00.BBBB.CCC.DD bevel

20501.AA00.BBBB.CCC.DD bevel monopoint

**°bevel must always be accompanied with a °bloc** (see page 141)

max. 1 °bevel on bloc.300

max. 2 °bevel on bloc.600

max. 3 °bevel on bloc.900

**AA Finish**

- 01 black
- 02 white
- 22 aluminum anodised brushed
- 23 brass anodised brushed
- 25 bronze anodised brushed
- 26 dark bronze anodised brushed

**BBBB Light**

- 9527 cri 95, 2700K
- 9530 cri 95, 3000K

**CCC Optic**

- |     |     |                |
|-----|-----|----------------|
| 300 | 30° | 670lm - 1550cd |
| 450 | 45° | 700lm - 1070cd |
| 600 | 60° | 690lm - 811cd  |

**Output\***

**DD Dimming**

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)

**Accessories**

- 10150.0100 recessed ceiling rose black, Ø50 mm
- 10150.0200 recessed ceiling rose white, Ø50 mm



\* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.