



Light efficiency:



Light quality:



Color temperature:

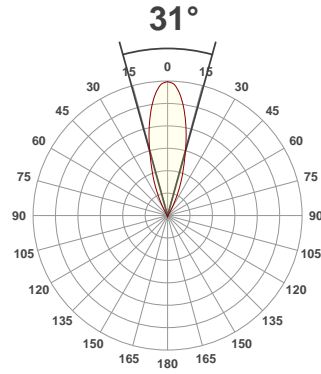

Product name:

knick small 30deg 3000K


Item number:

Date and time:


1/02/2020 14:39:44

Output: 693 Lumen Power consumption: 9,6


Spectral distribution

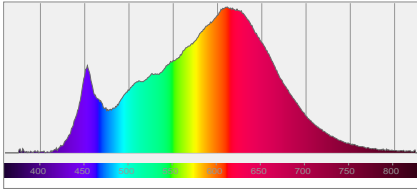


Color coordinates



White color point




CRI R values

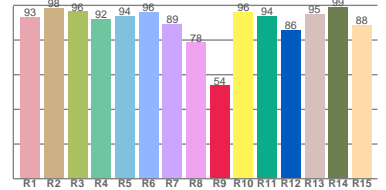

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3125 K	92,2	53,7	90,6	98,5	90,6	0,425	0,394	0,247	0,344	-0,0023

Beam details

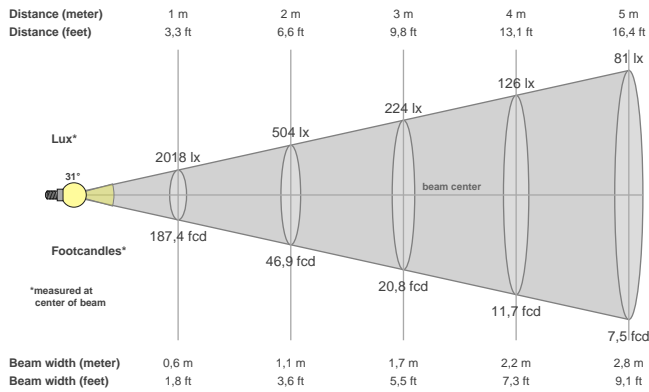

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
31°	55,7°	70,2°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
2018 cd	95,6%	94,7%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
2018lx	504lx	224lx	126lx	81lx	56lx	41lx	32lx	25lx	20lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx	5lx
187,4fcd	46,9fcd	20,8fcd	11,7fcd	7,5fcd	5,2fcd	3,8fcd	2,9fcd	2,3fcd	1,9fcd	1,5fcd	1,3fcd	1,1fcd	1fcd	0,8fcd	0,7fcd	0,6fcd	0,6fcd	0,5fcd	0,5fcd

Power scope

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Power	Power factor	Power frequency
9,6 W	0,88	{FREQ } Hz

Nominal voltage	Voltage	Current
230 V	48,0 V	0,200 A