

Light efficiency:

58 Lumen/Watt


Light quality:

CRI: 96,5

Color temperature:

3063 K

60,1°



Product name:

IN-286 3000K 60deg


Item number:

Date and time:


1/02/2020 15:22:20

Output: 746 Lumen Power consumption: 13,0


Spectral distribution

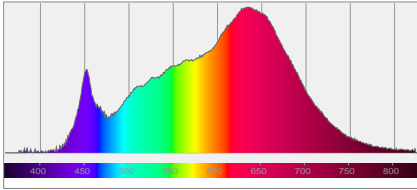


Color coordinates



White color point




CRI R values

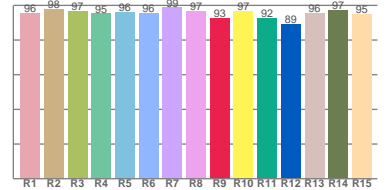

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3063 K	96,5	92,7	94,9	103,8	95,5	0,427	0,390	0,250	0,343	-0,0042

Beam details

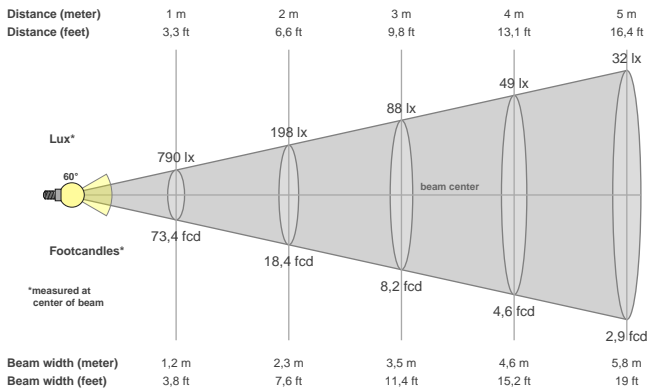

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
60,1°	90,5°	97,5°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
790 cd	95,3%	92,5%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
790lx	198lx	88lx	49lx	32lx	22lx	16lx	12lx	10lx	8lx	7lx	5lx	5lx	4lx	4lx	3lx	3lx	2lx	2lx	2lx
73,4fcd	18,4fcd	8,2fcd	4,6fcd	2,9fcd	2fcd	1,5fcd	1,1fcd	0,9fcd	0,7fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd

Power scope

Power	Power factor	Power frequency
13,0 W	0,52	{FREQ} Hz

Nominal voltage	Voltage	Current
230 V	48,0 V	0,270 A

Nominal voltage	Voltage	Current
230 V	48,0 V	0,270 A