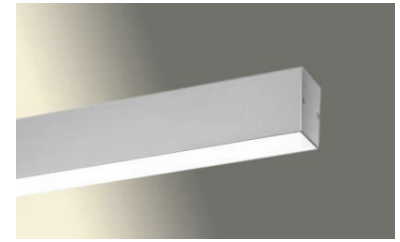



**PRODUCT DESCRIPTION**

Extruded profile in aluminium, champagne, white or black powder coated with opal polycarbonate protection. Available in several color temperatures, dimmable and non dimmable.

Different compositions can be made with different lengths and corners.

**TECHNICAL DATA**

Application	ceiling - recessed, surface and suspension wall - surface
Dimensions	L x 59 x 80mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

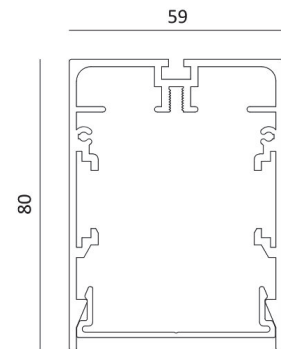

Color Temperature		Forward current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	plexi	450mA	144 lm/W	80+	A++
	BAP	/	/	/	/
3000K	plexi	450mA	152 lm/W	80+	A++
	BAP	350mA	130 lm/W	80+	A++
4000K	plexi	450mA	158 lm/W	80+	A++
	BAP	350mA	142 lm/W	80+	A++

**ORDER REFERENCE**

> [PROFILE](#)

<b>PROFILE /m</b>	ZUMI34PF160SFP	<b>+ W / B / A / C</b>	U59 EMPTY profile /m
<b>END CAP</b>	ZUMI34PF160EC	<b>+ W / B / A / C</b>	U59 ENDCAP
<b>PMMA /m</b>	ZUMI34PMMA		U59 PMMA satin plexi profile/m

(W (white) / B (black) / A (aluminium) / C (champagne))

> [MODULES FOR PMMA](#)

**PMMA NOT INCLUDED, TO BE ORDERED SEPARATELY!**

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
<b>2700K</b>	1685mm	ZUMI34PL1558270101	35,9W	4500 lm
	1404mm	ZUMI34PM1558270101	29,9W	4200 lm
	1123mm	ZUMI34PS1558270101	23,9W	3000 lm
	842mm	ZUMI34M1558270101	17,9W	2250 lm
	562mm	ZUMI34S1558270101	12,0W	1500 lm

<b>3000K</b>	1685mm	ZUMI34PL1528300101	35,9W	4800 lm
	1404mm	ZUMI34PM1528300101	29,9W	4000 lm
	1123mm	ZUMI34PS1528300101	23,9W	3200 lm
	842mm	ZUMI34M1528300101	17,9W	2400 lm
	562mm	ZUMI34S1528300101	12,0W	1600 lm

4000K	1685mm	ZUMI34PL1538400101	35,9W	4980 lm
	1404mm	ZUMI34PM1538400101	29,9W	4150 lm
	1123mm	ZUMI34PS1538400101	23,9W	3320 lm
	842mm	ZUMI34M1538400101	17,9W	2490 lm
	562mm	ZUMI34S1538400101	12,0W	1660 lm

> [MODULES FOR BAP](#)

**BAP INCLUDED!**

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
3000K	1685mm	ZUMI34RL03083001011	41,4W	4680 lm
	1404mm	ZUMI34RM03083001011	34,5W	3900 lm
	1123mm	ZUMI34RS03083001011	27,6W	3120 lm
	842mm	ZUMI34RXM03083001011	20,7W	2340 lm
	562mm	ZUMI34RXS03083001011	13,8W	1560 lm

4000K	1685mm	ZUMI34RL03184001011	41,4W	5100 lm
	1404mm	ZUMI34RM03184001011	34,5W	4250 lm
	1123mm	ZUMI34RS03184001011	27,6W	3400 lm
	842mm	ZUMI34RXM03184001011	20,7W	2550 lm
	562mm	ZUMI34RXS03184001011	13,8W	1700 lm

> [OPTIONS](#)

<b>CORNER 90°</b>		ZUMI34C90		U59 Corner 90°
<b>CORNER 180°</b>		ZUMI34C180		U59 Corner 180°
<b>SQUARE BASE</b>		ZUMIPD6060	<b>+ W / B / A</b>	Square base 60x60
<b>ROUND BASE</b>		ZUMIPD801	<b>+ W / B / A</b>	Round base ø80mm
<b>WIRE 1,60m</b>		ZUMI12WIRE160		WIRE 5x0,75 1M60
<b>WIRE 6,00m</b>		ZUMI12WIRE600		WIRE 5x0,75 6M00
<b>SUSPENSION CABLE SINGLE</b>		ZUMI12SUSPSU70160		U59 suspension cable single 1m60
		ZUMI12SUSPSU70600		U59 suspension cable single 6m00
<b>COVERPROF.</b>		ZUMI34COVER	<b>+ W / B / A / C</b>	U59 coverprofile /m
<b>EMERGENCY KIT</b>		on request		

> [CONVERTER](#)

Included, if dimmable: DALI, DSI, switchDIM (for dimmable add D to order reference!)