


PRODUCT DESCRIPTION


Aluminium extruded profile, aluminium, white or black powder coated, with opal polycarbonate protection. Available in several color temperatures, dimmable and non dimmable.

Different compositions can be made with different lengths and corners.

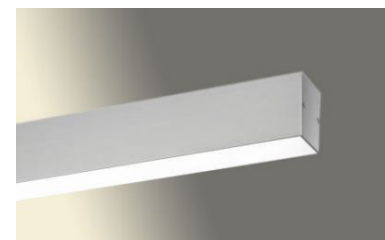

TECHNICAL DATA

Application	ceiling - recessed, surface and suspension wall - surface
Dimensions	L x 59 x 80mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	58000h (2700K: >50000h)
MacAdam ellipse	3
Guarantee	5 year

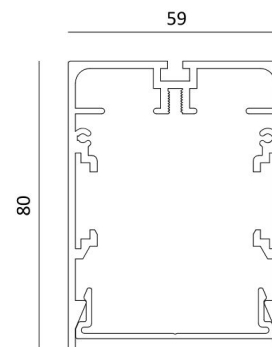

Color Temperature		Forward current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	plexi	300mA	131 lm/W	80+	A+
	BAP	/	/	/	/
3000K	plexi	350mA	135 lm/W	80+	A++
	BAP	350mA	130 lm/W	80+	A++
4000K	plexi	350mA	140 lm/W	80+	A++
	BAP	350mA	142 lm/W	80+	A++

ORDER REFERENCE

> [PROFILE](#)

PROFILE /m	ZUMI34PF160SFP + W / B / A	U59 EMPTY profile /m
END CAP	ZUMI34PF160EC + W / B / A	U59 ENDCAP
PMMA /m	ZUMI34PMMA	U59 PMMA satin plexi profile/m

(W (white) / B (black) / A (aluminium))

> [MODULES FOR PMMA](#)

PMMA NOT INCLUDED, TO BE ORDERED SEPARATELY!

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
2700K	1685mm	ZUMI34PL02682701011	73,1W	8340 lm
	1404mm	ZUMI34PM02682701011	61,0W	6950 lm
	1123mm	ZUMI34PS02682701011	48,8W	5560 lm
	842mm	ZUMI34PXM02682701011	36,6W	4170 lm
	562mm	ZUMI34PXS02682701011	24,4W	2780 lm

3000K	1685mm	ZUMI34PL02783001011	78,7W	9300 lm
	1404mm	ZUMI34PM02783001011	65,6W	7750 lm
	1123mm	ZUMI34PS02783001011	52,4W	6200 lm
	842mm	ZUMI34PXM02783001011	39,3W	4650 lm
	562mm	ZUMI34PXS02783001011	26,2W	3100 lm

4000K	1685mm	ZUMI34PL02884001011	78,7W	9600 lm
	1404mm	ZUMI34PM02884001011	65,6W	8000 lm
	1123mm	ZUMI34PS02884001011	52,4W	6400 lm
	842mm	ZUMI34PXM02884001011	39,3W	4800 lm
	562mm	ZUMI34PXS02884001011	26,2W	3200 lm

> [MODULES FOR BAP](#)

BAP INCLUDED!

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
3000K	1685mm	ZUMI34RL02783001011	85,6W	8910 lm
	1404mm	ZUMI34RM02783001011	71,3W	7425 lm
	1123mm	ZUMI34RS02783001011	57,0W	5940 lm
	842mm	ZUMI34RXM02783001011	42,8W	4455 lm
	562mm	ZUMI34RXS02783001011	28,5W	2970 lm

4000K	1685mm	ZUMI34RL02884001011	85,6W	9720 lm
	1404mm	ZUMI34RM02884001011	71,3W	8100 lm
	1123mm	ZUMI34RS02884001011	57,0W	6480 lm
	842mm	ZUMI34RXM02884001011	42,8W	4860 lm
	562mm	ZUMI34RXS02884001011	28,5W	3240 lm

> [OPTIONS](#)

CORNER 90°		ZUMI34C90	U59 Corner 90°
CORNER 180°		ZUMI34C180	U59 Corner 180°
SQUARE BASE		ZUMIPD6060 + W / B / A	Square base 60x60
ROUND BASE		ZUMIPD801 + W / B / A	Round base ø80mm
WIRE 1,60m		ZUMI12WIRE160	WIRE 5x0,75 1M60
WIRE 6,00m		ZUMI12WIRE600	WIRE 5x0,75 6M00
SUSPENSION CABLE SINGLE		ZUMI12SUSPSU70160	U59 suspension cable single 1m60
		ZUMI12SUSPSU70600	U59 suspension cable single 6m00
COVERPROF.		ZUMI34COVER + W / B / A	U59 Blind cover
EMERGENCY KIT		on request	

> [CONVERTER](#)

Included, if dimmable: DALI, DSI, switchDIM (for dimmable add D to order reference!)