


PRODUCT DESCRIPTION


Aluminium extruded profile, aluminium, white or black powder coated, with opal polycarbonate protection. The PI-LED-version makes it possible to change color from 2500K to 7000K but also to create all additional RGB-colors. This way any atmosphere can be created.

Different compositions can be made with different lengths and corners.

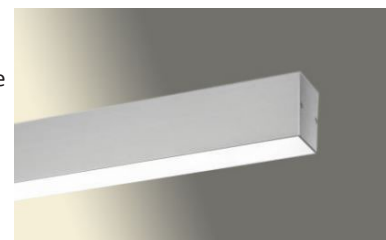

TECHNICAL DATA

Application	ceiling - resseced, surface and suspension wall - surface
Dimensions	L x 59 x 80mm
IP rating	IP20
Power	230V
Lifetime L70/B10/65°	50000h
MacAdam ellipse	3
Guarantee	5 year

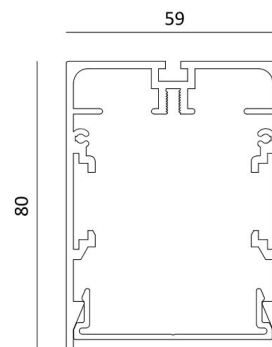

Color Temperature	Supply Voltage	Lumen/Watt (LED)	CRI	Energy Label
2500K-7000K RGB	48V	110 lm/W	90+	A+

ORDER REFERENCE

> [PROFILE](#)

PROFILE /m	ZUMI34PF160SFP + W / B / A	U59 EMPTY profile /m
END CAP	ZUMI34PF160EC + W / B / A	U59 ENDCAP
PMMA /m	ZUMI34PMMA	U59 PMMA satin plexi profile/m

(W (white) / B (black) / A (aluminium))

> [MODULES FOR PMMA](#)

PMMA NOT INCLUDED, TO BE ORDERED SEPARATELY!

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
DALI				
2500K-7000K RGB	1685mm	ZUMI34PL127PI01011	54 W	6000 lm
	1404mm	ZUMI34PM142PI01011	45 W	5000 lm
	1123mm	ZUMI34PS126PI01011	36 W	4000 lm
	842mm	ZUMI34PXM141PI01011	27 W	3000 lm
ZigBee				
2500K-7000K RGB	1685mm	ZUMI34PL128PI01011	54 W	6000 lm
	1404mm	ZUMI34PM144PI01011	45 W	5000 lm
	1123mm	ZUMI34PS101PI01011	36 W	4000 lm
	842mm	ZUMI34PXM143PI01011	27 W	3000 lm

> OPTIONS

CORNER 90°		ZUMI34C90	U59 Corner 90°
CORNER 180°		ZUMI34C180	U59 Corner 180°
SQUARE BASE		ZUMIPD6060 + W / B / A	Square base 60x60
ROUND BASE		ZUMIPD801 + W / B / A	Round base ø80mm
WIRE 1,60m		ZUMI12WIRE160	WIRE 5x0,75 1M60
WIRE 6,00m		ZUMI12WIRE600	WIRE 5x0,75 6M00
SUSPENSION CABLE SINGLE		ZUMI12SUSPSU70160	U59 suspension cable single 1m60
		ZUMI12SUSPSU70600	U59 suspension cable single 6m00
COVERPROF.		ZUMI34COVER + W / B / A	U59 Blind cover /m

CONVERTER

Included, standard dimmable DALI (only Device Type 8) or ZigBee.