


**PRODUCT DESCRIPTION**

Aluminium extruded profile, aluminium, white or black powder coated, with opal polycarbonate protection. Tunable white from 3000K up to 6000K, standard dimmable (DALI, DSI or switchDIM).


Different compositions can be made with different lengths and corners.

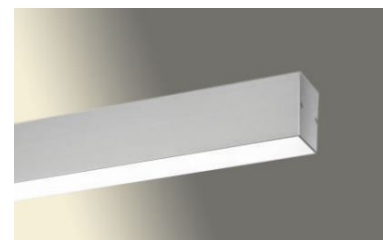

**TECHNICAL DATA**

Application	ceiling - resseced, surface and suspension wall - surface
Dimensions	L x 59 x 80mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	50000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Forward Current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3000K-6000K	250mA	110 lm/W	80+	A+

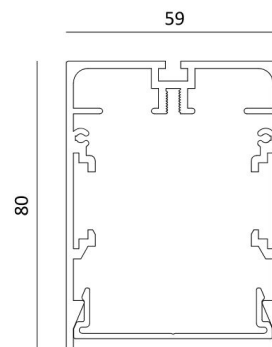

**ORDER REFERENCE**

> PROFILE

<b>PROFILE /m</b>	ZUMI34PF160SFP + W / B / A	U59 EMPTY profile /m
<b>END CAP</b>	ZUMI34PF160EC + W / B / A	U59 ENDCAP
<b>PMMA /m</b>	ZUMI34PMMA	U59 PMMA satin plexi profile/m






(W (white) / B (black) / A (aluminium))


> MODULES FOR PMMA

**PMMA NOT INCLUDED, TO BE ORDERED SEPARATELY!**

COLOR TEMP.	LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
3000K - 6000K	1404mm	ZUMI34PM083TW01011	63 W	7150 lm
	1123mm	ZUMI34PS080TW01011	52 W	5700 lm
	842mm	ZUMI34PXM079TW01011	40 W	4300 lm

> OPTIONS

<b>CORNER 90°</b>		ZUMI34C90	U59 Corner 90°
<b>CORNER 180°</b>		ZUMI34C180	U59 Corner 180°
<b>SQUARE BASE</b>		ZUMIPD6060 + W / B / A	Square base 60x60
<b>ROUND BASE</b>		ZUMIPD801 + W / B / A	Round base ø80mm
<b>WIRE 1,60m</b>		ZUMI12WIRE160	WIRE 5x0,75 1M60
<b>WIRE 6,00m</b>		ZUMI12WIRE600	WIRE 5x0,75 6M00

> OPTIONS**SUSPENSION  
CABLE SINGLE**ZUMI12SUSPSU70160  
ZUMI12SUSPSU70600U59 suspension cable single 1m60  
U59 suspension cable single 6m00**COVERPROF.**ZUMI34COVER + **W / B / A**

U59 Blind cover

> CONVERTER

Included, standard dimmable DALI (only Device Type 8), DSI, switchDIM