

**PRODUCT DESCRIPTION**


Recessed downlighter with very small trim for general or accent lighting.  
Aluminium luminaire available in different colors. Standard equipped with torsion springs.



**TECHNICAL DATA**

|                       |                       |
|-----------------------|-----------------------|
| Application           | ceiling - recessed    |
| Dimensions            | cut out: ø92mm h140mm |
| IP rating             | IP55                  |
| Power                 | 500mA                 |
| Lifetime L70/F10/65°C | >55000h               |
| MacAdam ellipse       | 3                     |
| Guarantee             | 5 year                |

(\*on components, only if ordered luminaire + driver)

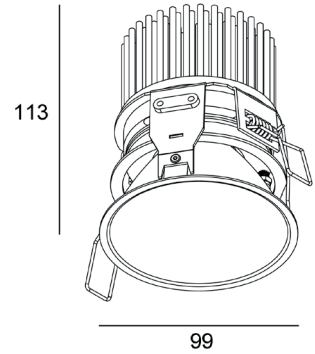

| Color Temperature                    | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|--------------------------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2400K                                | 16,9W   | 500mA           | 1181 lm                    | 70 lm/W                         | 90+ | F            |
| 2700K                                | 16,9W   | 500mA           | 2232 lm                    | 139 lm/W                        | 90+ | E            |
| 3000K                                | 16,9W   | 500mA           | 2458 lm                    | 148 lm/W                        | 90+ | E            |
| 4000K<br><u>only for White/Black</u> | 16,9W   | 500mA           | 2569 lm                    | 156 lm/W                        | 90+ | E            |

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE + W (white) / B (black) / A (alu) C (champagne) / BR (bronze) / T (titanium)**

|              |               |  |
|--------------|---------------|--|
| <b>2400K</b> | ZUMI351960107 | UKKIE M SLE G7 21mm 1181lm 500mA 16,9W 2400K CRI90 excl.driver |
| <b>2700K</b> | ZUMI351960107 | UKKIE M SLE G7 21mm 2232lm 500mA 16,9W 2700K CRI90 excl.driver |
| <b>3000K</b> | ZUMI351970107 | UKKIE M SLE G7 21mm 2458lm 500mA 16,9W 3000K CRI90 excl.driver |
| <b>4000K</b> | ZUMI351990107 | UKKIE M SLE G7 21mm 2569lm 500mA 16,9W 4000K CRI90 excl.driver |

> DRIVER

**dimmable**

TRID28000671+28001114 LCA 25W 350–1050mA one4all SR PRE + plug 500mA

**non dimmable**

TRID28000700 +28001114 LC 25W 350–1050mA flexC SR EXC + plug 500mA

> OPTIONS

**Flat Springs**

ZUMIFS Flat Springs

**Emergency kit**

On request