

PRODUCT DESCRIPTION

Recessed downlighter with very small trim for general or accent lighting.
The tunable white version has a color temperature range from 2700K up to 6500K.

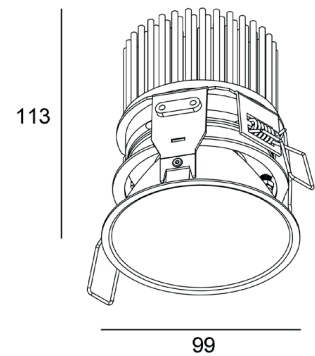
Aluminium luminaire available in different colors. Standard equipped with torsion springs.

**TECHNICAL DATA**

Application	ceiling - recessed
Dimensions	cut out: \varnothing 92mm h140mm
IP rating	IP55
Power	850mA
Lifetime L70/B10/65°C	60000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire + driver)

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
WW	27,6W	850mA	2812 lm	102 lm/W	90	F
CW	27,6W	850mA	2776 lm	101lm/W	90	F

**ORDER REFERENCE**

> LUMINAIRE

! ORDER REFERENCE + W (white) / B (black) / A (alu) C (champagne) / BR (bronze) / T (titanium)

ZUMI352780325 Ukkie M TW SLE3000 PRE2 2812/2776lm 27,6W 2700-6500K CRI90+ excl. driver

> DRIVER - REQUIRED!

dimnable DALI DT8 (only Device Type 8), switchDIM

TRID28002202	LCA 38W 350-1050mA DT8 SR PRE
TRID28001121	I-SELECT 2 PLUG 850MA BL (DALI DT8 (only Device Type 8), switchDIM) +colourswitch by push button

Control via switchDIM:

A driverentional double pushbutton switch can be used for control via switchDIM.
One of the pushbuttons is used to set the colour temperature, the other to set the dimming level.

For control via a switchDIM switch different settings can be made:

- Setting for the colour temperature via colourTEMPERATURE mode or colourSWITCH mode with 8 predefined values 2,700 K and 6,500 K.
- Stepless setting for the dimming level between 15 and 100 %.

> OPTIONS

PC-cover

ZUMI010000000500 PC-cover for food environment \varnothing 111

Flat Springs

ZUMIFS Flat Springs