

PRODUCT DESCRIPTION

Recessed downlighter with very small trim for general or accent lighting.
Aluminium luminaire available in different colors. Standard equipped with torsion springs.




TECHNICAL DATA

Application ceiling - recessed
 Dimensions cut out: ø140mm h160mm
 IP rating IP55
 Power 700mA
 Lifetime L70/F10/65°C >55000h
 MacAdam ellipse 3
 Guarantee 5 year
 (*on components, only if ordered luminaire + driver)

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2400K	23,6W	700mA	1653 lm	71 lm/W	90+	F
2700K	23,6W	700mA	3125 lm	134 lm/W	90+	E
3000K	23,6W	700mA	3441 lm	147 lm/W	90+	E
4000K <u>only Black/White</u>	23,6W	700mA	3596 lm	154 lm/W	90+	E

138

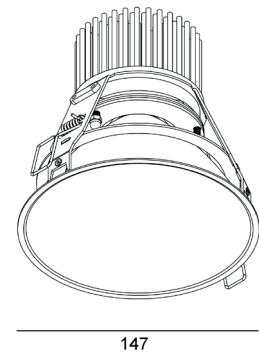

147

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + W (white) / B (black) / A (alu) C (champagne) / BR (bronze) / T (titanium)

2400K	ZUMI361910108	UKKIE L SLE G7 1653lm 700mA 23,6W 2400K CRI90 excl.driver
2700K	ZUMI361960108	UKKIE L SLE G7 3125lm 700mA 23,6W 2700K CRI90 excl.driver
3000K	ZUMI361970108	UKKIE L SLE G7 3441lm 700mA 23,6W 3000K CRI90 excl.driver
4000K	ZUMI361990108	UKKIE L SLE G7 3596lm 700mA 23,6W 4000K CRI90 excl.driver

> DRIVER

dimmable

TRID28000671 + 28001118 LC 25W 350-1050mA one4all SR PRE + plug 700mA

non dimmable

TRID28000700 + 28001118 LC 25W 350-1050mA flexC SR EXC + plug 700mA

> OPTION

Flat Springs

ZUMIFS Flat Springs

Emergency kit

On request