


PRODUCT DESCRIPTION

The TUBB S80 is a rotatable spot placed on a plate with a diameter of 80mm for general or accent lighting. Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	semi-recessed
Dimensions	cut out ø 60mm h 60mm
IP rating	IP20
Power	350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)

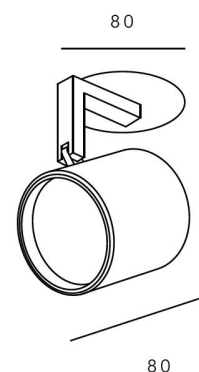

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	11,8W	350mA	1558 lm	134 lm/W	90+	E
	16,9W	500mA	2225 lm	134 lm/W	90+	E
3000K	11,8W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	500mA	2449 lm	147 lm/W	90+	E
3500K	11,8W	350mA	1732 lm	149 lm/W	90+	E
	16,9W	500mA	2474 lm	149 lm/W	90+	E
4000K	11,8W	350mA	1775 lm	152 lm/W	90+	E
	16,9W	500mA	2536 lm	152 lm/W	90+	E

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector) option only for 2700K or 3000K

2700K

14°	ZUMI722132317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI722132417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI722132517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI722132617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

3000K

14°	ZUMI722142317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI722142417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI722142517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI722142617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

3500K

14°	ZUMI722152317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 14° glass excl. driver
25°	ZUMI722152417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 25° glass excl. driver
39°	ZUMI722152517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 39° glass excl. driver
61°	ZUMI722152617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 61° glass excl. driver

4000K

14°	ZUMI722162317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 14° glass excl. driver
25°	ZUMI722162417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 25° glass excl. driver
39°	ZUMI722162517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 39° glass excl. driver
61°	ZUMI722162617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 61° glass excl. driver

> DRIVER**dimmable**

TRID28000675	LCA 25W 350-1050mA one4all SC PRE (DALI, DSI, switchDIM)
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

non dimmable

TRID28000706	LC 25W 350-1050mA flexC SC EXC
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

> OPTIONS**Honeycomb grid**

PRODUCT DESCRIPTION

The TUBB S80 is a rotatable spot placed on a plate with a diameter of 80mm for general or accent lighting equipped with a LEDmodule especially to enlighten several food products.

There's a choice between 'fish' to light up fish products, 'gold' for bakery goods and 'gold+' for rather crusty bakery goods such as croissants and baguettes.

The cannon 'meat+' provides a highly red color which is ideal for the presentation of meat.


Its 'fresh meat' is suitable to use for meat in the counter. Fruit is ideal for fruit and vegetables.

Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

Application	semi-recessed
Dimensions	cut out ø 60mm h 60mm
IP rating	IP20
Power	350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)

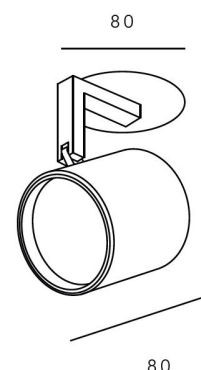

Color Temperature	Wattage excl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
FISH	11,8W	350mA	1411 lm	121 lm/W	/	E
	16,9W	500mA	2015 lm	121 lm/W	/	E
GOLD 2700K	11,8W	350mA	1308 lm	112 lm/W	/	E
	16,9W	500mA	1868 lm	112 lm/W	/	E
GOLD+ 2400K	11,8W	350mA	826 lm	73 lm/W	/	F
	16,9W	500mA	1171 lm	70 lm/W	/	F
MEAT+	11,8W	350mA	879 lm	75 lm/W	/	n.a
	16,9W	500mA	1256 lm	75 lm/W	/	n.a
FRESH MEAT	11,8W	350mA	857 lm	74 lm/W	/	n.a
	16,9W	500mA	1224 lm	74 lm/W	/	n.a
FRUIT	11,8W	350mA	1224 lm	105 lm/W	/	F
	16,9W	500mA	1748 lm	105 lm/W	/	F

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector) option only for Gold 2700K

FISH

14°	ZUMI722173117	Tubb S80 Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 14° PC excl. driver
25°	ZUMI722171917	Tubb S80 Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 25° PC excl. driver
39°	ZUMI722172017	Tubb S80 Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 39° PC excl. driver
61°	ZUMI722172117	Tubb S80 Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 61° PC excl. driver

GOLD 2700K

14°	ZUMI722183117	Tubb S80 Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 14° PC excl. driver
25°	ZUMI722181917	Tubb S80 Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 25° PC excl. driver
39°	ZUMI722182017	Tubb S80 Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 39° PC excl. driver
61°	ZUMI722182117	Tubb S80 Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 61° PC excl. driver

GOLD+ 2400K

14°	ZUMI722083117	Tubb S80 Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 14° PC excl. driver
25°	ZUMI722081917	Tubb S80 Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 25° PC excl. driver
39°	ZUMI722082017	Tubb S80 Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 39° PC excl. driver
61°	ZUMI722082117	Tubb S80 Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 61° PC excl. driver

MEAT+

14°	ZUMI722193117	Tubb S80 Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 14° PC excl. driver
25°	ZUMI722191917	Tubb S80 Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 25° PC excl. driver
39°	ZUMI722192017	Tubb S80 Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 39° PC excl. driver
61°	ZUMI722192117	Tubb S80 Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 61° PC excl. driver

FRESH MEAT

14°	ZUMI722203117	Tubb S80 Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 14° PC excl. driver
25°	ZUMI722201917	Tubb S80 Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 25° PC excl. driver
39°	ZUMI722202017	Tubb S80 Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 39° PC excl. driver
61°	ZUMI722202117	Tubb S80 Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 61° PC excl. driver

FRUIT

14°	ZUMI722213117	Tubb S80 Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 14° PC excl. driver
25°	ZUMI722211917	Tubb S80 Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 25° PC excl. driver
39°	ZUMI722212017	Tubb S80 Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 39° PC excl. driver
61°	ZUMI722212117	Tubb S80 Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 61° PC excl. driver

> DRIVER**dimmable**

TRID28000675	LC 25W 350-1050mA one4all SC PRE (DALI, DSI, switchDIM)
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

non dimmable

TRID28000706	LC 25W 350-1050mA flexC SC EXC
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

> OPTIONS**Honeycomb grid**

ZUMI25HC	Honeycomb grid
----------	----------------

PRODUCT DESCRIPTION

The TUBB S80 is a rotatable spot placed on a plate with a diameter of 80mm for general or accent lighting. Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA


Application	semi-recessed
Dimensions	cut out ø 60mm h 60mm
IP rating	IP20
Power	350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	2
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)

Color Temperature	Wattage excl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3100K	11,8W	350mA	1210 lm	104 lm/W	98	F
	16,9W	500mA	1729 lm	104 lm/W	98	F



80



80

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector)

14°	ZUMI722222317	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 14° glass excl. driver
25°	ZUMI722222417	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 25° glass excl. driver
39°	ZUMI722222517	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 39° glass excl. driver
61°	ZUMI722222617	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 61° glass excl. driver

> [DRIVER](#)

dimnable

TRID28000675	LCA 25W 350-1050mA one4all SC PRE (DALI, DSI, switchDIM)
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

non dimnable

TRID28000706	LC 25W 350-1050mA flexC SC EXC
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

> [OPTIONS](#)

Honeycomb grid

ZUMI25HC	Honeycomb grid
----------	----------------

PRODUCT DESCRIPTION


The TUBB S80 is a rotatable spot placed on a plate with a diameter of 80mm for general or accent lighting. Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application semi-recessed
 Dimensions cut out ø 60mm h 60mm
 IP rating IP20
 Power 350mA / 500mA
 Lifetime L70/F10/65°C >55000h
 MacAdam ellipse 2
 Guarantee 5 year
 (*on components, only if ordered luminaire **+driver**)



80



80

Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3250K	11,8W	350mA	1313 lm	136 lm/W	95	F	F
	16,9W	500mA	1876 lm	136 lm/W	95	F	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) W (white) / B (black) / G (gold) / F (forest)

14°	ZUMI722232317	Tubb S80 Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 14° glass excl. driver
25°	ZUMI722232417	Tubb S80 Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 25° glass excl. driver
39°	ZUMI722232517	Tubb S80 Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 39° glass excl. driver
61°	ZUMI722232617	Tubb S80 Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 61° glass excl. driver

> DRIVER

dimmable

TRID28000675	LCA 25W 350-1050mA one4all SC PRE (DALI, DSI, switchDIM)
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

non dimmable

TRID28000706	LC 25W 350-1050mA flexC SC EXC
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

OPTIONS

Honeycomb grid

ZUMI25HC	Honeycomb grid
----------	----------------