

PRODUCT DESCRIPTION

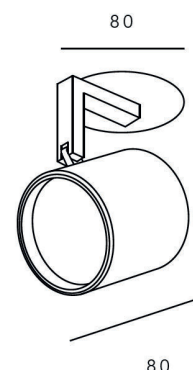
The TUBB S80 is a rotatable spot placed on a plate with a diameter of 80mm for general or accent lighting. Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	semi-recessed
Dimensions	cut out ø 60mm h 60mm
IP rating	IP20
Power	350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	2
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)

Color Temperature	Wattage excl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3100K	11,8W	350mA	1210 lm	104 lm/W	98	F
	16,9W	500mA	1729 lm	104 lm/W	98	F

**ORDER REFERENCE**

> [LUMINAIRE](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector)

14°	ZUMI72222317	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 14° glass excl. driver
25°	ZUMI72222417	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 25° glass excl. driver
39°	ZUMI72222517	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 39° glass excl. driver
61°	ZUMI72222617	Tubb S80 Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3000K 61° glass excl. driver

> [DRIVER](#)

dimnable

TRID28000675	LCA 25W 350-1050mA one4all SC PRE (DALI, DSI, switchDIM)
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

non dimmable

TRID28000706	LC 25W 350-1050mA flexC SC EXC
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

> [OPTIONS](#)

Honeycomb grid

ZUMI25HC	Honeycomb grid
----------	----------------