


**PRODUCT DESCRIPTION**

The TUBB S80 is a rotatable spot placed on a plate with a diameter of 80mm for general or accent lighting. Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

Application	semi-recessed
Dimensions	cut out ø 60mm h 60mm
IP rating	IP20
Power	350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire **+driver**)

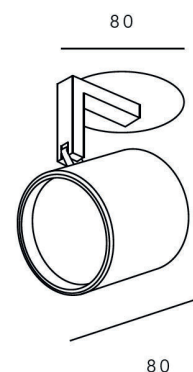

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	11,8W	350mA	1558 lm	134 lm/W	90+	E
	16,9W	500mA	2225 lm	134 lm/W	90+	E
3000K	11,8W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	500mA	2449 lm	147 lm/W	90+	E
3500K	11,8W	350mA	1732 lm	149 lm/W	90+	E
	16,9W	500mA	2474 lm	149 lm/W	90+	E
4000K	11,8W	350mA	1775 lm	152 lm/W	90+	E
	16,9W	500mA	2536 lm	152 lm/W	90+	E

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)  
+ (2) **G** (gold reflector) option only for 2700K or 3000K

**2700K**

14°	ZUMI722132317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI722132417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI722132517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI722132617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

**3000K**

14°	ZUMI722142317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI722142417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI722142517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI722142617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

**3500K**

14°	ZUMI722152317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 14° glass excl. driver
25°	ZUMI722152417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 25° glass excl. driver
39°	ZUMI722152517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 39° glass excl. driver
61°	ZUMI722152617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 61° glass excl. driver

**4000K**

14°	ZUMI722162317	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 14° glass excl. driver
25°	ZUMI722162417	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 25° glass excl. driver
39°	ZUMI722162517	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 39° glass excl. driver
61°	ZUMI722162617	Tubb S80 CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 61° glass excl. driver

> DRIVER**dimmable**

TRID28000675	LCA 25W 350-1050mA one4all SC PRE (DALI, DSI, switchDIM)
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

**non dimmable**

TRID28000706	LC 25W 350-1050mA flexC SC EXC
+ TRID28001168	Strain-relief
+ TRID28001110	PLUG 350mA
of	
+ TRID28001114	PLUG 500mA

> OPTIONS**Honeycomb grid**