


**PRODUCT DESCRIPTION**

359° rotatable, track mounted luminaire.  
Aluminium profile, white or black powder coated, with opal polycarbonate protection.  
Available in several color temperatures, dimmable and non dimmable.

**TECHNICAL DATA**

Application	3F track
Dimensions	1153 x 40 x 57mm
IP rating	IP20
Power	230V
Lifetime L70/F10/50°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

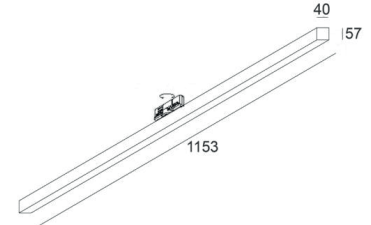

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 50°C)	Lumen/Watt (LED) (at tp = 50°C)	CRI	Energy Label
2700K	20,9W	400mA	2448 lm	135 lm/W	90+	D
3000K	20,9W	400mA	2544 lm	142 lm/W	90+	D
4000K	20,9W	400mA	2640 lm	148 lm/W	90+	D

**ORDER REFERENCE**

> [Luminaire](#)

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)  
+ (2) **DD1** (for DALI dim.Eutrac) / **DD2** (for DALI dim. Global)

<b>2700K</b>	ZUMI142380119	Copter 3F LO LLE ADV 2448lm 400mA 20,9W CRI90+ 2700K incl.driver
<b>3000K</b>	ZUMI142390119	Copter 3F LO LLE ADV 2544lm 400mA 20,9W CRI90+ 3000K incl.driver
<b>4000K</b>	ZUMI142400119	Copter 3F LO LLE ADV 2640lm 400mA 20,9W CRI90+ 4000K incl.driver
<b>5000K</b>	<i>on request</i>	

> [Driver](#)

Included, if dimmable: DALI.  
Dimmable 1-10V on request.