


## PRODUCT DESCRIPTION

359° rotatable, track mounted luminaire.  
Aluminium profile, white or black powder coated, with opal polycarbonate protection.  
The additional spacer makes the luminaire placed a bit lower. This makes it possible to place the two different copters next to each other without interfering one another.


The PI-LED-version makes it possible to change color from 1800K to 16000K but also to create all additional RGB-colors. This way any atmosphere can be created.

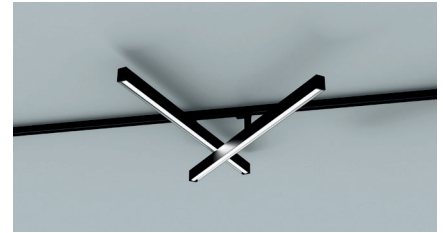

40

## TECHNICAL DATA

Application	3F track (Eutrack - Global)
Dimensions	1153 x 40 x 57mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	50000h
MacAdam ellipse	3
Guarantee	5 year

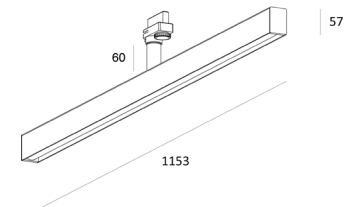

Color Temperature	Wattage	Supply Voltage	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
1800K-16000K RGB	39,2W	48V	4500 lm	115 lm/W	90+	F

## ORDER REFERENCE

> [Luminaire](#)

**! ORDER REFERENCE + W (white) / B (black)**

**PI-LED** ZUMI802660104 Copter T60 3F PI-LED 36W 230V 4000 lm CRI90+ incl. driver dim DALI (Only DT8)

> [Driver](#)

Included, dimmable DALI (only Device Type 8).

> recommended track : Eutrac 3F