


PRODUCT DESCRIPTION

359° rotatable, track mounted luminaire.
Aluminium profile, white or black powder coated, with opal polycarbonate protection.
The additional spacer makes the luminaire placed a bit lower. This makes it possible to place the two different copters next to each other without interfering one another.

Available in several color temperatures, dimmable and non dimmable.

**TECHNICAL DATA**

Application	3F track
Dimensions	1153 x 40 x 57mm
IP rating	IP20
Power	230V
Lifetime L70/F10/50°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

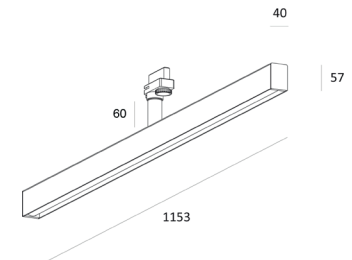

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 50°C)	Lumen/Watt (LED) (at tp = 50°C)	CRI	Energy Label
2700K	20,9W	400mA	2448 lm	135 lm/W	90+	D
3000K	20,9W	400mA	2544 lm	142 lm/W	90+	D
4000K	20,9W	400mA	2640 lm	148 lm/W	90+	D

ORDER REFERENCE

> [Luminaire](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
+ (2) **DD1** (for DALI dim.Eutrac) / **DD2** (for DALI dim. Global)

2700K	ZUMI802380119	Copter T60 3F LO LLE 2448lm 400mA 20,9W CRI90+ 2700K 230V incl.driver
3000K	ZUMI802390119	Copter T60 3F LO LLE 2544lm 400mA 20,9W CRI90+ 3000K 230V incl.driver
4000K	ZUMI802400119	Copter T60 3F LO LLE 2640lm 400mA 20,9W CRI90+ 4000K 230V incl.driver
5000K	<i>on request</i>	

> [Driver](#)

Included, if dimmable: DALI.
Dimmable 1-10V on request.