

PRODUCT DESCRIPTION


359° rotatable, track mounted luminaire.
Aluminium profile, white or black powder coated, with opal polycarbonate protection.
The additional spacer makes the luminaire placed a bit lower. This makes it possible to place the two different copters next to each other without interfering one another.

The tunable white version goes from 2700K up to 6500K and is standard dimmable.



TECHNICAL DATA

Application	3F track (Eutrack - Global)
Dimensions	1153 x 40 x 57mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	46000h
MacAdam ellipse	3
Guarantee	5 year

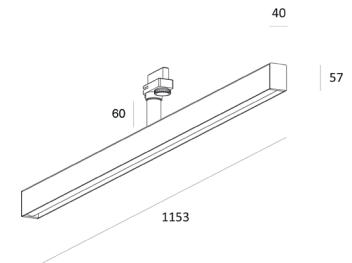

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
WW	54W	275mA	6040lm	130 lm/W	90+	F
CW	54W	275mA	6720lm	145 lm/W	90+	F

ORDER REFERENCE

> [Luminaire](#)

! ORDER REFERENCE + W (white) / B (black)

TW ZUMI802320120 Copter T60 3F TW LLE HO PREM. 1158mm 54W 275mA 6000lm 2700K-6500K CRI90+ incl.driver

> [Driver](#)

Included, dimmable DALI (only Device Type 8).

> recommended track : Eutrac 3F